

DATA SHEET

VTLF 2.360




ROTARY VANE VACUUM PUMPS

oil-free
air-cooled

MAKE IT BECKER.



- 1** Thanks to high-quality construction, vacuum pumps are both durable and reliable, suitable for demanding conditions.
- 2** The transparent filter cover makes it easy to spot contamination, while the larger filter surface extends the time between replacement intervals. With simple, on-site maintenance, downtime is minimised.
- 3** Effective noise-reducing features help lower noise levels, contributing to a more pleasant working environment.

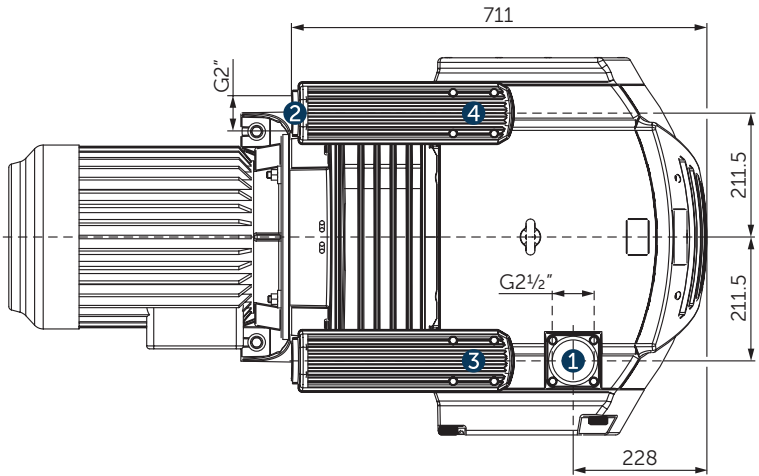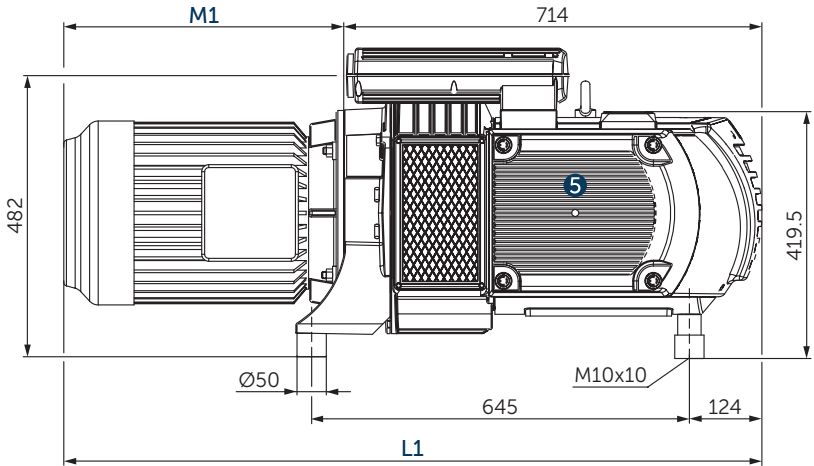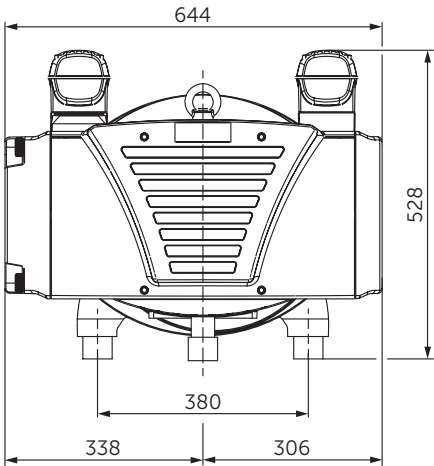


- 1 Vacuum connection (G2½")
- 2 Exhaust air connection (G2")
- 3 Vacuum relief valve with silencer
- 4 Blow-off valve with silencer
- 5 Suction filter
- L Overall device length L1 with motor. L1 and M1 are variable, see [motor specification sheet](#).
- The motor illustration may vary.
- Dimensions in mm

Suction air rate		Vacuum absolute		Installed motor power		Emission sound pressure level ¹⁾		Weight w/o motor
m³/h		mbar		kW		dB(A)		kg
50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz	
351	402	250	350	11.0	13.2	80.5	82.5	151

¹⁾ According to DIN EN ISO 3744 (KpA = 3 dB(A)), 1 m distance, at medium load, both connection sides piped

- Reference data (atmosphere): 1000 mbar, 20°C; Tolerance: ±5%

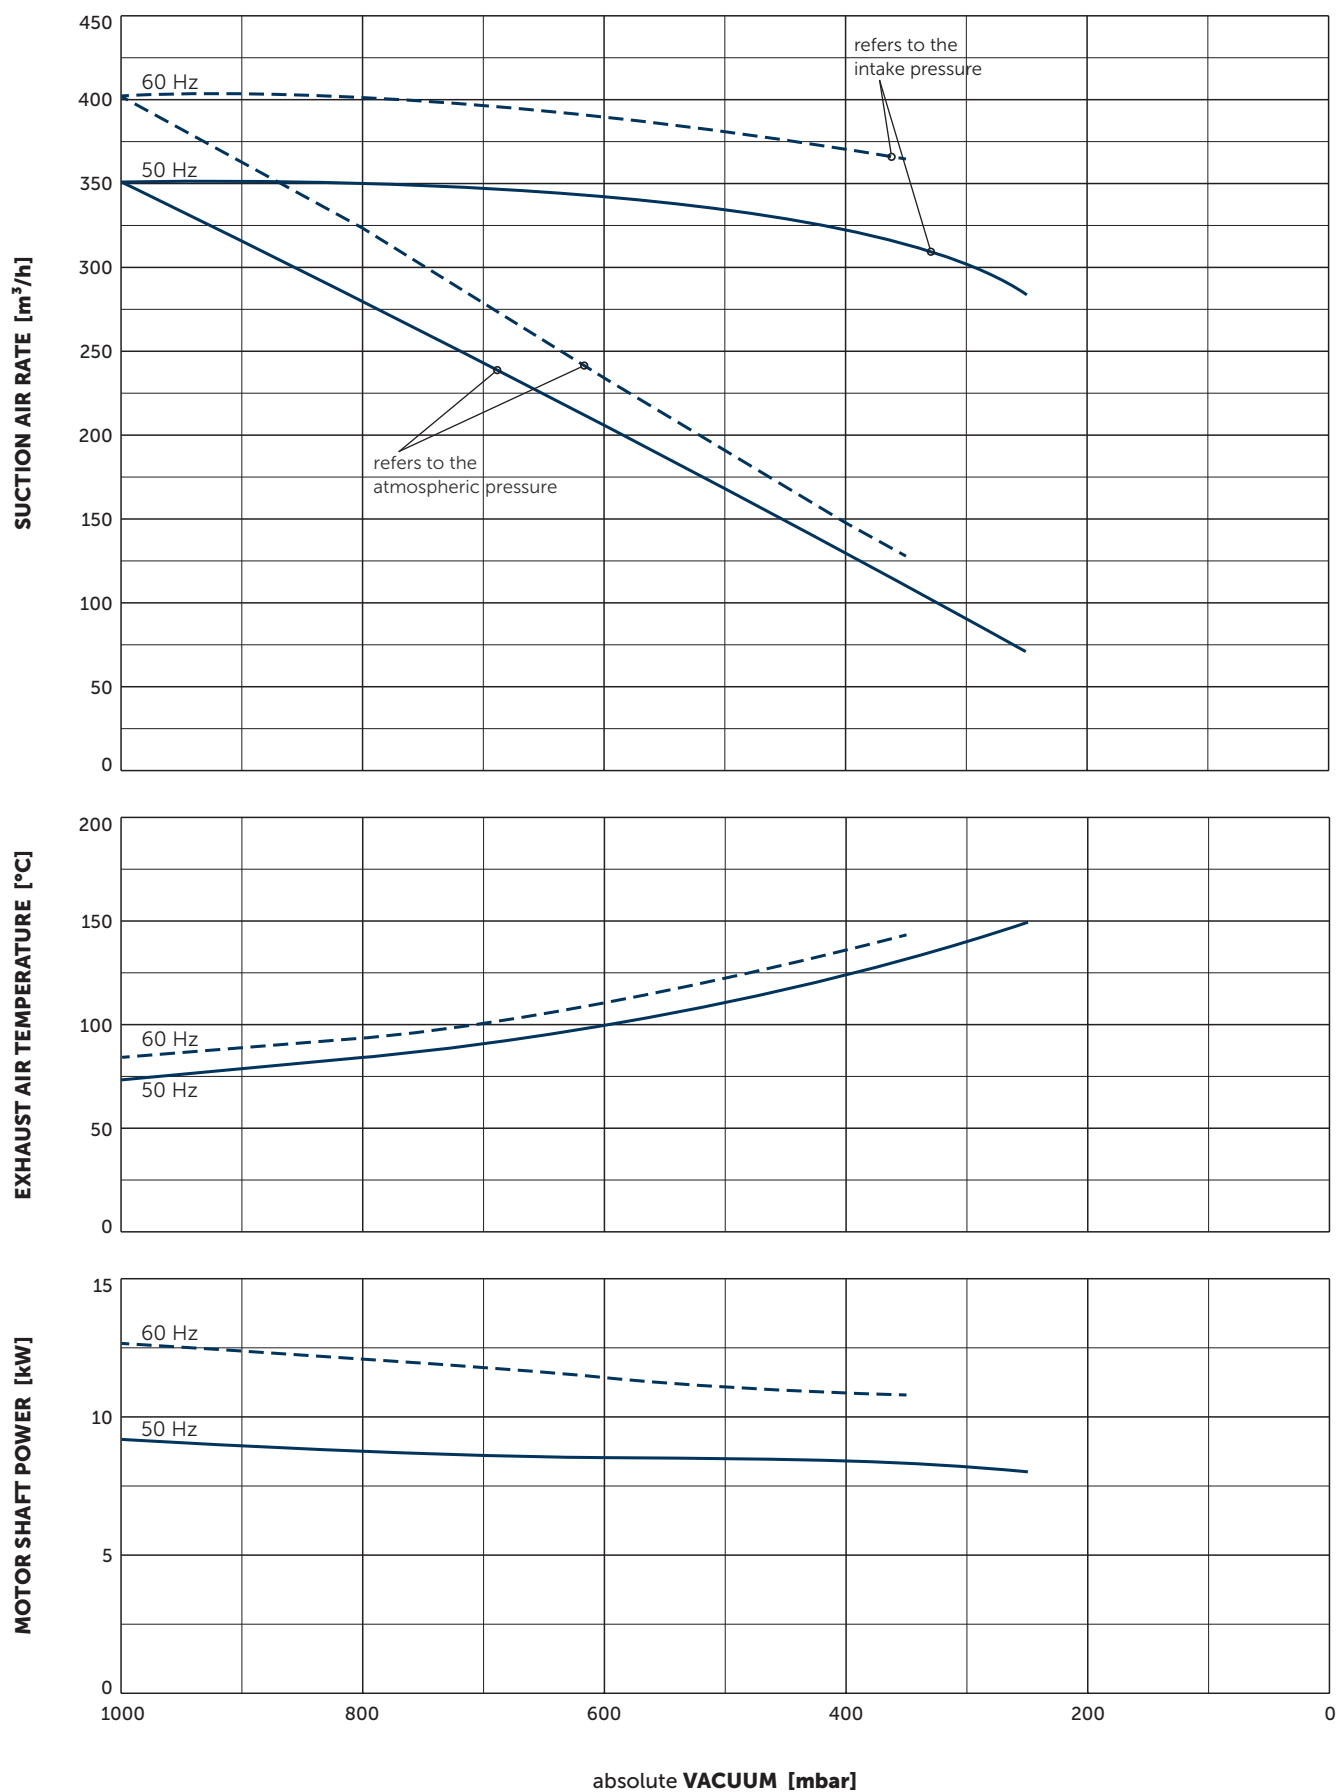

Reference data (atmosphere): 1000 mbar, 20°C
Tolerance: $\pm 5\%$

VARIANTS AND ACCESSORIES

- Integrated non return valve
- External suction filter¹⁾
- Sound proof box SH 10¹⁾



Example for an external suction filter



Sound proof box SH 10

¹⁾ See separate data sheet

- Possible combinations on request

MAKE IT BECKER.



MOTOR
SPECIFICATIONS

www.becker-international.com
www.becker-international-shop.com

